

Report No: NCP-RP-2019-011 Rev A
Report Date: May 14, 2021

Prepared by:

Elizabeth Clarkson

Reviewed by:

Jonathan Tisack

Evelyn Lian

Approved by:

Royal Lovingfoss

Rev	By	Date	Rev App By	Pages Revised or Added

May 14, 2021

NCP-RP-2019-011 Rev A

4.22 “25/50/25” Filled-Hole Tension 1 (FHT1)78

4.23 “10/80/10” Filled-Hole Tension 2 (FHT2)80

4.24 “50/40/10” Filled-Hole Tension 3 (FHT3)82

4.25 “25/50/25” Open-Hole Compression 1 (OHC1)84

4.26 “10/80/10” Open-Hole Compression 2 (OHC2)86

4.27 “50/40/10” Open-Hole Compression 3 (OHC3)88

4.28 “25/50/25” Filled-Hole Compression 1 (FHC1)90

4.29 “10/80/10” Filled-Hole Compression 2 (FHC2)92

4.30 “50/40/10” Filled-Hole Compression 3 (FHC3)94

4.31 “25/50/25” Single-Shear Bearing 1 (SSB1, Proc. C)96

4.32 “10/80/10” Single-Shear Bearing 2 (SSB2, Proc. C)99

4.33 “50/40/10” Single-Shear Bearing 3 (SSB3, Proc. C)101

4.34 Interlaminar Tension and Curved Beam Strength (ILT and CBS)103

4.35 “25/50/25” Compression After Impact 1 (CAI1)105

5. Outliers106

6. References108

List of Figures

Figure 4-1: Batch plot for LT Strength normalized 37
Figure 4-2: Batch Plot for TT Strength as-measured..... 39
Figure 4-3: Batch plot for LC Strength normalized derived from UNC0..... 41
Figure 4-4: Batch Plot for TC Strength as-measured..... 43
Figure 4-5: Batch plot for 0FLEX Proc. A Strength normalized 47
Figure 4-6: Batch plot for 90FLEX Proc. A Strength normalized 49
Figure 4-7: Batch plot for IPS for 0.2% Offset Strength and Strength at 5% Strain as-measured..... 52
Figure 4-8: Batch plot for DNS Strength as-measured 55
Figure 4-9: Batch plot for DNS1 Strength as-measured 56
Figure 4-10: Batch Plot for UNT1 Strength normalized..... 58
Figure 4-11: Batch Plot for UNT2 Strength normalized..... 60
Figure 4-12: Batch Plot for UNT3 Strength normalized..... 62
Figure 4-13: Batch Plot for UNC0 Strength normalized..... 64
Figure 4-14: Batch plot for UNC1 Strength normalized..... 66
Figure 4-15: Batch plot for UNC2 Strength normalized..... 68
Figure 4-16: Batch plot for UNC3 Strength normalized..... 70
Figure 4-17: Batch Plot for OHT1 Strength normalized 72
Figure 4-18: Batch Plot for OHT2 Strength normalized 74
Figure 4-19: Batch Plot for OHT3 Strength normalized 76
Figure 4-20: Batch plot for FHT1 Strength normalized

List of Tables

Table 1-1: Test Property Abbreviations 9

Table 1-2: Test Property Symbols 10

Table 1-3: Environmental Conditions Abbreviations 10

Table 2-1: Weibull Distribution Basis Value Factors..... 22

Table 2-2: B-Basis Hanson-Koopmans Table 25

Table 2-3: A-Basis Hanson-Koopmans Table 26

Table 3-1: NCAMP Recommended B-basis Values for Lamina Test Data..... 31

Table 3-2: NCAMP Recommended B-basis Values for Laminate Test Data..... 32

Table 3-3: Summary of Test Results for Lamina Data 33

Table 3-4: Summary of Test Results for Laminate Data 34

Table 4-1: Statistics and Basis values for LT Strength data..... 37

Table 4-2: Statistics from LT Modulus data 38

Table 4-3: Statistics and Basis Values for TT Strength data..... 40

Table 4-4: Statistics from TT Modulus data 40

Table 4-5: Statistics and Basis Values for LC Strength derived from UNC0 42

Table 4-6: Statistics from LC Modulus..... 42

Table 4-7: Statistics and Basis Values for TC Strength data..... 44

Table 4-8: Statistics from TC Modulus data 44

Table 4-9: Statistics and Basis Values for 0FLEX Proc. A Strength normalized data 48

Table 4-10: Statistics and Basis Values for 0FLEX Proc. A Strength as-measured data 48

Table 4-11: Statistics and Basis Values for 90FLEX Proc. A Strength data..... 50

Table 4-12: Statistics and Basis Values for IPS Strength data 52

Table 4-13: Statistics from IPS Modulus data 53

Table 4-14: Statistics and Basis Values for DNS Strength data 55

Table 4-15: Statistics and Basis Values for DNS1 Strength data 57

Table 4-16: Statistics and Basis Values for UNT1 Strength data..... 59

Table 4-17: Statistics from UNT1 Modulus data 59

Table 4-18: Statistics and Basis Values for UNT2 Strength data..... 61

Table 4-19: Statistics from UNT2 Modulus data 61

Table 4-20: Statistics and Basis Values for UNT3 Strength data..... 63

Table 4-21: Statistics from UNT3 Modulus data 63

Table 4-22: Statistics and Basis Values for UNC0 Strength data..... 65

Table 4-23: Statistics from UNC0 Modulus data..... 65

Table 4-24: Statistics and Basis Values for UNC1 Strength data..... 67

Table 4-25: Statistics from UNC1 Modulus data..... 67

Table 4-26: Statistics and Basis Values for UNC2 Strength data..... 69

Table 4-27: Statistics from UNC2 Modulus data..... 69

Table 4-28: Statistics and Basis Values for UNC3 Strength data..... 71

Table 4-29: Statistics from UNC3 Modulus data..... 71

Table 4-30: Statistics and Basis Values for OHT1 Strength data 73

Table 4-31: Statistics and Basis Values for OHT2 Strength data 75

Table 4-32: Statistics and Basis Values for OHT3 Strength data 77

Table 4-33: Statistics and Basis Values for FHT1 Strength data 79

Table 4-34: Statistics and Basis Values for FHT2 Strength data 81

Table 4-35: Statistics and Basis Values for FHT3 Strength data 83

Table 4-36: Statistics and Basis Values for OHC1 Strength data 85
Table 4-37: Statistics and Basis Values for OHC2 Strength data 87
Table 4-38: Statistics and Basis Values for OHC3 Strength data 89
Table 4-39: Statistics and Basis Values for FHC1 Strength data 91
Table 4-40: Statistics and Basis Values for FHC2 Strength data 93
Table 4-41: Statistics and Basis Values for FHC3 Strength data 95
Table 4-42: Statistics and Basis Values for SSB1 Proc. C 2% Offset Strength data 98
Table 4-43: Statistics and Basis Values for SSB1 Proc. C Ultimate Strength data 98
Table 4-44: Statistics and Basis Values for SSB2 Proc. C Strength data 100
Table 4-45: Statistics and Basis Values for SSB3 Proc. C Strength data 102
Table 4-46: Statistics for ILT and CBS data 104
Table 4-47: Statistics for CAI1 Strength data 105
Table 5-1: List of Outliers 107

May 14, 2021

NCP-RP-2019-011 Rev A

1. Introduction

May 14, 2021

NCP-RP-2019-011 Rev A

May 14, 2021

NCP-RP-2019-011 Rev A

2. Background

2.1 CMH17 STATS Statistical Formulas and Computations

2.1.1 Basic Descriptive Statistics

$$b_B f \frac{\sqrt{f}}{\sqrt{f}} \frac{f}{f} \frac{f\sqrt{f}}{f\sqrt{f}} \quad \text{Equation 10}$$

$$c_B f \frac{\sqrt{f}}{\sqrt{f}} \frac{f}{f} \frac{f\sqrt{f}}{f\sqrt{f}} \quad \text{Equation 11}$$

$$b_A f \frac{\sqrt{f}}{\sqrt{f}} \frac{f}{f} \frac{f\sqrt{f}}{f\sqrt{f}} \quad \text{Equation 12}$$

$$c_A f \frac{\sqrt{f}}{\sqrt{f}} \frac{f}{f} \frac{f\sqrt{f}}{f\sqrt{f}} \quad \text{Equation 13}$$

2.1.4 Modified Coefficient of Variation

May 14, 2021

NCP-RP-2019-011 Rev A

$$\begin{aligned} a & \quad g \quad k \quad \quad \quad g \quad S \\ b & \quad g \quad k \quad Tk \quad g \quad T \quad S \quad T \quad g \\ c & \quad T \quad g \quad k \quad T \quad g \quad k \quad T \quad S \quad T \\ d & \quad T \quad k \quad Tk \\ S & \quad \begin{matrix} k \\ \hline i \quad n_i \end{matrix} \\ T & \quad \begin{matrix} n \\ \hline i \quad i \end{matrix} \\ g & \quad \begin{matrix} n & n \\ \hline i & j \quad i \quad n \quad i \quad j \end{matrix} \end{aligned}$$

2.1.8 Levene’s Test for Equality of Coefficient of Variation

$$w_{ij} = |y_{ij} - \bar{y}_i|$$

$$F = \frac{\sum_{i=1}^k n_i (\bar{w}_i - \bar{w})^2}{\sum_{i=1}^k \sum_{j=1}^{n_i} w_{ij}^2 - n (\bar{w})^2}$$

Equation 32

2.1.9 Distribution Tests

2.1.9.1 One-sided B-basis tolerance factors, k_B , for the normal distribution when sample size is greater than 15.

$$\frac{\sqrt{n}}{\sqrt{n}}$$

k_B

n

$/n$

Equation 33

$$\frac{n}{n} \quad \sum_{i=1}^n x_i \quad \frac{\sum_{i=1}^n x_i}{n} \quad x_i$$

$$V_B$$

$$n \frac{\quad}{n}$$

Equation 45

2.1.10.2 Non-parametric Basis Values for small samples

$$B \quad x_r \frac{x}{x_r}^k$$

Equation 50

$$A \quad x_n \frac{x}{x_n}^k$$

Equation 51

May 14, 2021

NCP-RP-2019-011 Rev A

n	k	n	k	n	k
2	80.00380	38	1.79301	96	1.32324
3	16.91220	39	1.77546	98	1.31553
4	9.49579	40	1.75868	100	1.30806
5	6.89049	41	1.74260	105	1.29036
6	5.57681	42	1.72718	110	1.27392
7	4.78352	43	1.71239	115	1.25859
8	4.25011	44	1.69817	120	1.24425
9	3.86502	45	1.68449	125	1.23080
10	3.57267	46	1.67132	130	1.21814
11	3.34227	47	1.65862	135	1.20620
12	3.15540	48	1.64638	140	1.19491
13	3.00033	49	1.63456	145	1.18421
14	2.86924	50	1.62313	150	1.17406
15	2.75672	52	1.60139	155	1.16440
16	2.65889	54	1.58101	160	1.15519
17	2.57290	56	1.56184	165	1.14640
18	2.49660	58	1.54377	170	1.13801
19	2.42833	60	1.52670	175	1.12997
20	2.36683	62	1.51053	180	1.12226
21	2.31106	64	1.49520	185	1.11486
22	2.26020	66	1.48063	190	1.10776
23	2.21359	68	1.46675	195	1.10092

May 14, 2021

NCP-RP-2019-011 Rev A

2.1.11.1 Calculation of basis values using ANOVA

$$u \frac{MSB}{MSE}$$

May 14, 2021

NCP-RP-2019-011 Rev A

3. Summary of Results

3.1 NCAMP Recommended B-basis Values

Lamina Strength Tests

					0.2% Offset	5% Strain				
B-basis	168.3	304.4	34.81	NA:A	6.159	11.58	15.34	210.7		91.28
Mean	188.5	358.9	39.49	15.29	6.834	13.14	16.77	232.2		102.2
CV	7.130	7.875	6.000	7.959	6.000	6.000	6.000	6.000		7.130
B-basis	157.5	285.3	27.12	12.08	4.763	8.379	12.67	179.6	NA:A	85.31
Mean	177.8	336.8	30.76	13.68	5.437	9.505	14.10	201.1	20.56	96.29
CV	6.479	8.842	6.000	6.000	6.000	6.000	6.000	6.303	7.201	6.479
B-basis	108.0	NA:A	15.21	5.951	1.519	4.025	6.727	116.8		57.81
Mean	128.2	364.6	17.20	6.750	1.800	4.565	8.161	138.3		68.78
CV	6.913	8.556	6.000	6.000	8.106	6.000	6.000	6.802		6.913

Notes: The modified CV B-basis value is recommended when available.
 The CV provided corresponds with the B-basis value given.
 NA implies that tests were run but data did not meet NCAMP recommended requirements.
 "NA: A" indicates ANOVA with 3 batches, "NA: I" indicates insufficient data,



3.2 Lamina and Laminate Summary Tables

Material: Toray Cetex® TC1225 (LM PAEK) T700GC 12k T1E Unitape 145 gsm 34% RC
Material Specification: NMS 122/1
Process Specification: NPS 81225
Fabric: T700GC-12K-T1E **Resin:** TC1225 PAEK

DMA, Tg(ambient): 288.06°F **DSC, Tg(ambient):** 288.84°F **Tg METHOD:** DMA (ASTM D7028) &
DMA, Tg(wet): 272.62°F **DSC, Melt Temperature (Peak):** 582.88°F DSC (ASTM D3418)
DSC, Hot Crystallization Temperature (Peak): 474.11°F

Fiber Lot
Date of fiber manufacture **Date of testing** 4/2/2019 - 10/08/2019
Resin Lot
Date of resin manufacture **Date of data submittal**
Prepreg Lot **Date of analysis** 8/1/2019 - 11/18/2019
Date of prepreg manufacture
Date of composite manufacture

B-Basis	Modified CV B-basis	Mean	B-Basis	Modified CV B-basis	Mean	B-Basis	Modified CV B-basis	Mean	B-Basis	Modified CV B-basis	Mean	B-Basis	Modified CV B-basis	Mean
322.1	321.6	370.7	302.8	302.2	351.3	248.8	322.0	371.1	262.6	235.1	309.8	275.7	258.2	340.2
(307.3)	(304.4)	(358.9)	(285.3)	NA	(336.8)	(197.1)	NA	(364.6)	(257.8)	(228.6)	(301.2)	(251.7)	(242.1)	(318.9)
		19.14			18.93			18.36			18.86			18.43
		(18.49)			(18.10)			(17.93)			(18.33)			(17.27)
		0.3331			0.3371			0.3253			0.5033			0.3744
8.702	NA	15.29	11.06	12.08	13.68	5.850	5.951	6.750	2.887	2.410	3.093	5.655	4.490	5.916
		1.410			1.318			1.010			0.2574			0.7640
176.0	173.5	192.9	164.3	161.8	181.3	116.8	109.6	129.1	39.55	36.51	48.10	73.50	NA	119.4
(169.6)	(168.3)	(188.5)	(158.8)	(157.5)	(177.8)	(113.5)	(108.0)	(128.2)	(39.83)	(37.14)	(48.93)	(76.21)	NA	(120.9)
		17.30			16.94			17.13			16.43			16.63
		(16.41)			(15.81)			(16.06)			(15.52)			(15.85)
		0.3647			0.3633			0.3614			0.3795			0.3423
38.34	34.81	39.49	29.60	27.12	30.76	16.06	15.21	17.20	6.390	5.898	7.435	13.97	11.92	15.70
		1.413			1.340			1.187			0.337			1.009
12.04	11.58	13.14	9.280	8.379	9.505	4.218	4.025	4.565	NA	NA	NA	3.373	2.861	3.770
6.270	6.159	6.834	5.179	4.763	5.437	1.519	NA	1.800	0.4929	0.4210	0.5403	0.6990	NA	1.341
		0.7326			0.6739			0.4790			0.09234			0.3746
205.2	217.0	242.1	160.0	186.1	211.2	94.98	NA	145.4			***	107.2	86.79	114.3
(220.8)	(210.7)	(232.2)	(149.3)	(179.6)	(201.1)	(123.0)	(116.8)	(138.3)			***	(105.2)	(84.36)	(111.1)
		18.45			18.17			21.24						
		(13.79)			NA	(20.56)								
93.04	93.73	104.2	89.41	87.18	97.68	62.37	58.43	68.93	20.18	18.62	24.54	38.95	39.09	63.30
(89.73)	(91.28)	(102.2)	(86.86)	(85.31)	(96.29)	(60.87)	(57.81)	(68.78)	(20.34)	(18.97)	(24.99)	(40.50)	(40.63)	(64.27)
		9.497			9.364			9.184			8.681			9.037
		(9.307)			(9.239)			(9.163)			(8.839)			(9.179)
15.54	15.34	16.77	13.39	12.67	14.10	6.363	6.727	8.161			***	6.565	5.621	7.406


* Derived from cross-ply using back-out factor

May 14, 2021

NCP-RP-2019-011 Rev A

4. Test Results, Statistics, Basis Values, and Graphs

4.1 Longitudinal Tension (LT)


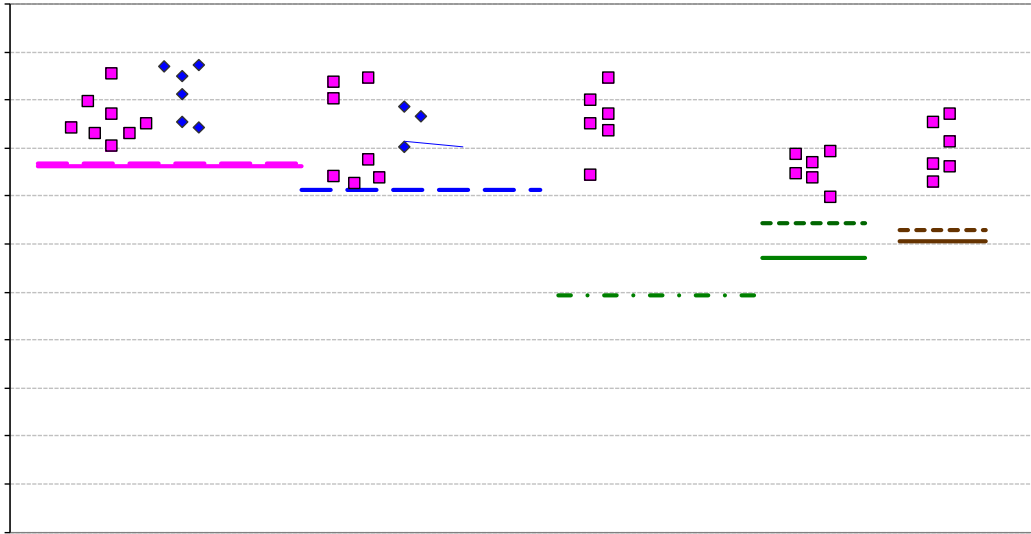


Longitudinal Tension Modulus Statistics										
Env	Normalized					As-measured				
	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	18.49	18.10	17.93	18.33	17.27	19.14	18.93	18.36	18.86	18.43
Stdev	0.5709	0.6202	0.6770	0.4136	0.2053	0.4001	0.4288	0.4488	0.3967	0.3645
CV	3.088	3.427	3.776	2.256	1.188	2.090	2.265	2.445	2.104	1.978
Mod CV	6.000	6.000	6.000	8.000	8.000	6.000	6.000	6.000	8.000	8.000
Min	17.33	16.92	16.70	17.80	17.12	18.61	18.41	17.54	18.38	17.78
Max	19.56	19.28	19.02	18.82	17.60	19.90	20.02	19.04	19.39	18.77
No. Batches	3	3	3	1	1	3	3	3	1	1
No. Spec.	18	18	18	6	6	18	18	18	6	6

Table 4-2: Statistics from LT Modulus data

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	15.29	13.68	6.750	3.093	5.916
Stdev	1.217	0.5464	0.2050	0.07420	0.08599
CV	7.959	3.995	3.037	2.399	1.454
Mod CV	7.979	6.000	6.000	8.000	8.000
Min	12.01	12.26	6.368	3.013	5.802
Max	16.85	14.59	7.196	3.191	6.030
No. Batches	3	3	3	1	1
No. Spec.	19	19	18	7	6
B-estimate	8.702	11.06	5.850	2.887	5.655
A-estimate	4.000	9.186	5.208	2.742	5.470
Method	ANOVA	ANOVA	ANOVA	Normal	Normal
B-basis Value		12.08	5.951		
B-estimate				2.410	4.490

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	188.5	177.8	128.2	48.93	120.9	192.9	181.3	129.1	48.10	119.4
Stdev	11.80	8.816	7.473	3.007	14.77	10.57	7.771	6.216	2.821	15.17
CV	6.259	4.958	5.827	6.144	12.21	5.482	4.287	4.816	5.864	12.70
Mod CV	7.130	6.479	6.913	8.000	12.21	6.741	6.143	6.408	8.000	12.70
N .	1422		V		202					



May 14, 2021

NCP-RP-2019-011 Rev A

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	39.49	30.76	17.20	7.435	15.70

4.5 Lamina Short-Beam Strength (SBS)

4.7 0° Flexural Test (0FLEX, Proc. A)



Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETW (275 F)
Mean	232.2	201.1	138.3	111.1
Stdev	5.770	9.265	7.752	1.959
CV	2.485	4.607	5.605	1.763
Modified CV	6.000	6.303	6.802	8.000
Min	224.8	183.9	120.1	107.8
Max	245.1	215.8	149.0	113.7

4.8 90° Flexural Test (90FLEX, Proc. A)

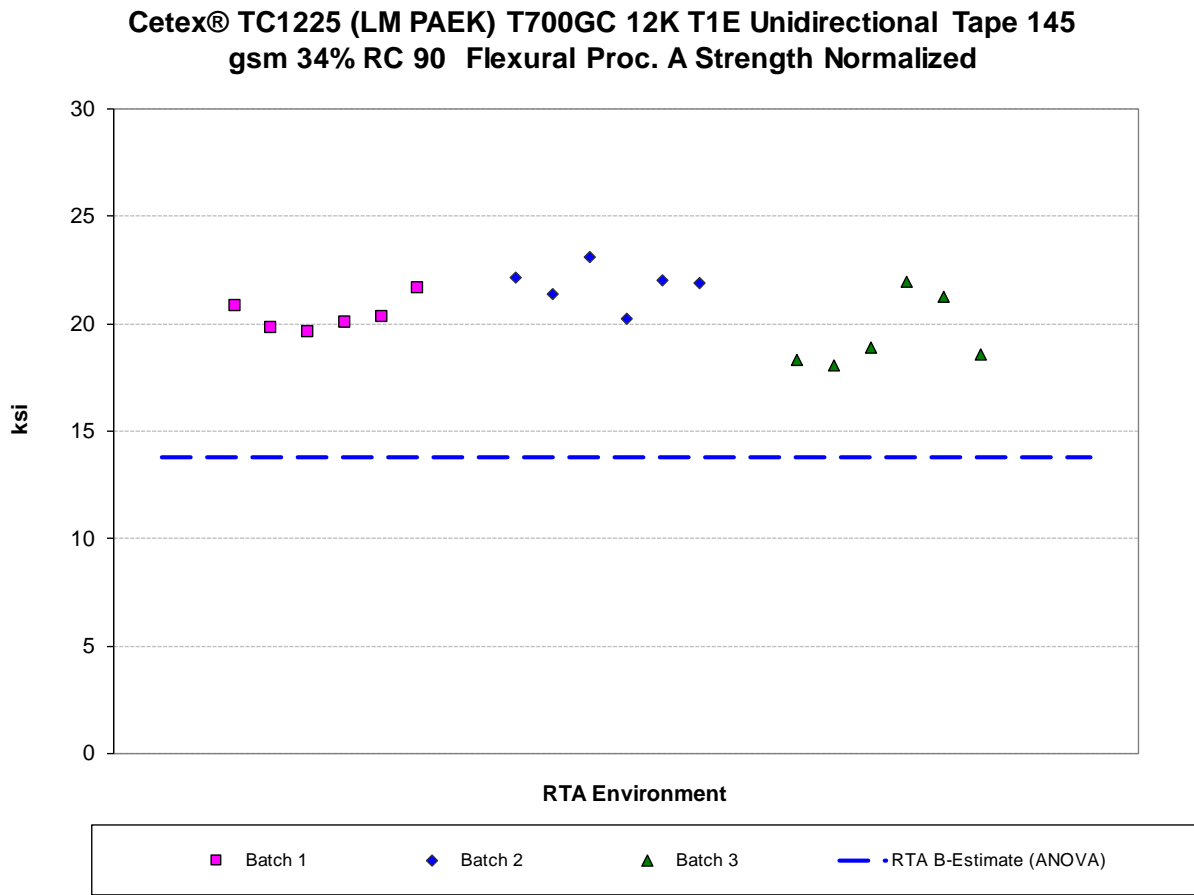


Figure 4-6: Batch plot for 90FLRie rm ū

RTA (70 F)	Normalized	As-Measured
Mean	20.56	21.24
Stdev	1.480	1.416
CV	7.201	6.664
Modified CV	7.601	7.332
Min	18.07	19.06
Max	23.12	23.79
No. Batches	3	3
No. Spec.	18	18
B-basis Value		18.45
B-estimate	13.79	
A-estimate	8.972	16.47



May 14, 2021

NCP-RP-2019-011 Rev A

4.9 In-Plane Shear (IPS)

Cetex® TC1225 (LM PAEK) T700GC 12K T1E Unidirectional Tape 145 gsm 34% RC In-Plane Shear Strength as measured

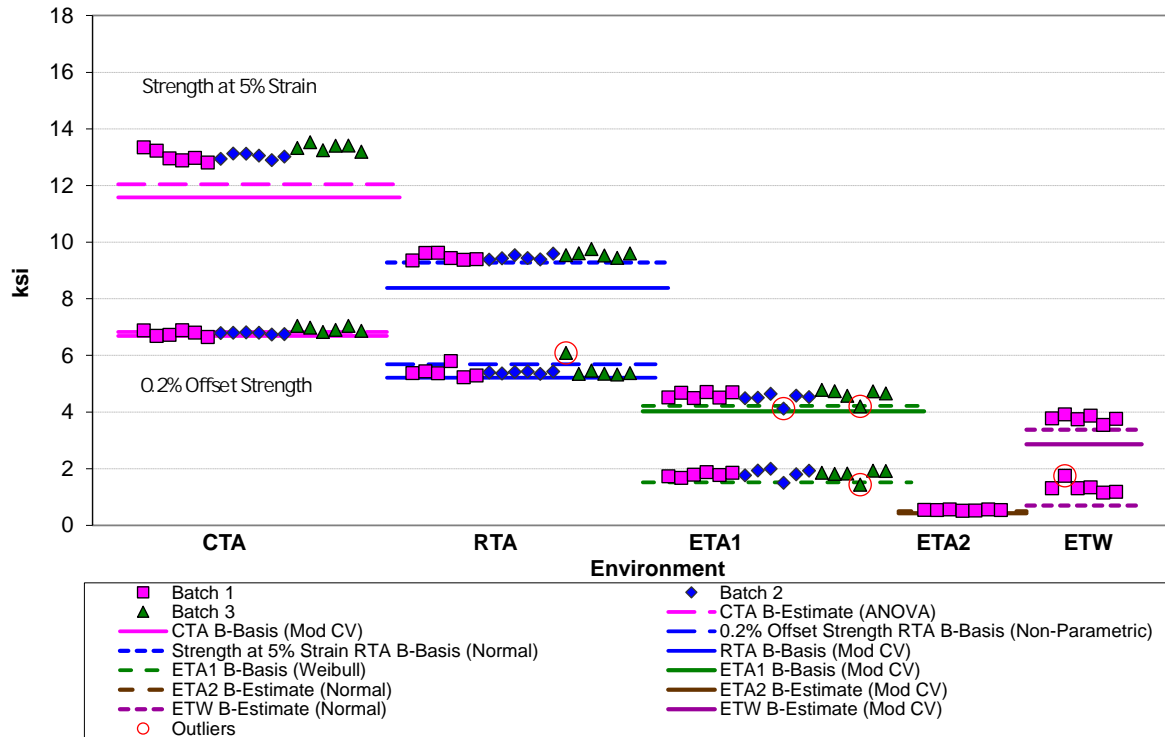



Figure 4-7: Batch plot for IPS for 0.2% Offset Strength and Strength at 5% Strain as-measured

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETW (275 F)
Mean	6.834	5.437	1.800	0.5403	1.341	13.14	9.505	4.565	3.770
Stdev	0.1099	0.1988	0.1459	0.01707	0.2120	0.2097	0.1142	0.1757	0.1310
CV	1.609	3.656	8.106	3.160	15.81	1.596	1.201	3.849	3.476
Mod CV	6.000	6.000	8.106	8.000	15.81	6.000	6.000	6.000	8.000
Min	6.650	5.231	1.436	0.5162	1.151	12.81	9.353	4.120	3.541
Max	7.044	6.089	1.994	0.5635	1.745	13.53	9.760	4.781	3.921
No. Batches	3	3	3	1	1	3	3	3	1
No. Spec.	18	18	18	7	6	18	18	18	6
B-basis Value		5.179	1.519				9.280	4.218	
B-estimate	6.270			0.4929	0.6990	12.0	99i403V	1.60	asis

May 14, 2021

NCP-RP-2019-011 Rev A

4.10 In-Plane (Interlaminar) Shear Double Notch (Round) Shear Strength

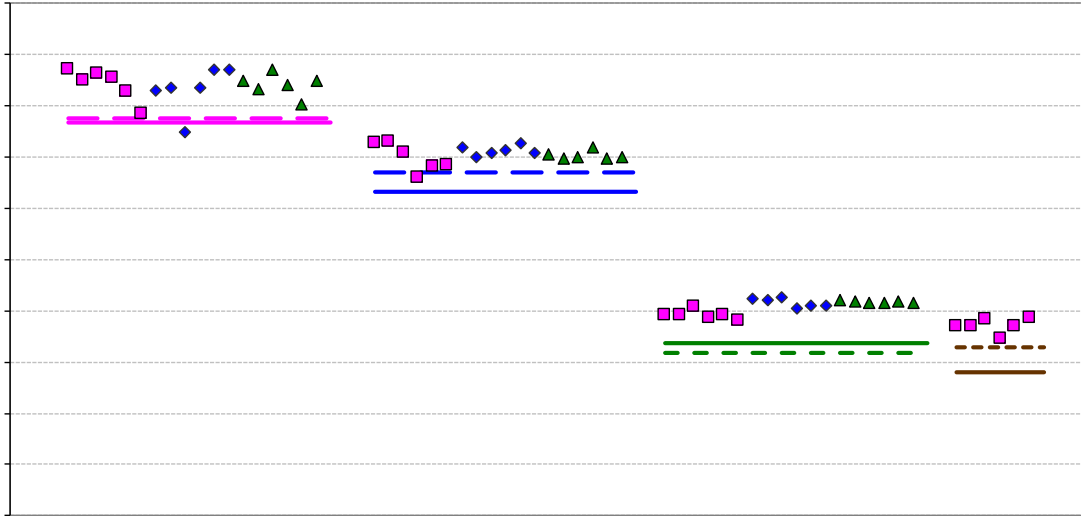

4.11 Laminate In-Plane Shear (Interlaminar) Double Notch (Round) Shear Strength (DNS1)

Env	RTA (70 F)	ETA1 (275 F)	ETW (275 F)
Mean	12.09	6.964	6.265
Stdev	0.4804	0.3927	0.2343
CV	3.972	5.638	3.739
Mod CV	6.000	6.819	8.000
Min	11.02	6.262	5.911
Max	12.73	7.874	6.525
No. Batches	3	3	1
No. Spec.	18	19	6
B-basis Value		6.244	
B-estimate	9.960		5.555
A-estimate	8.440	5.785	5.051
Method	ANOVA	Lognormal	Normal
B-basis Value	10.984	5.862	
B-estimate			4.755
A-estimate	10.232	5.108	3.722
Method	pooled	pooled	Norma

May 14, 2021

NCP-RP-2019-011 Rev A

4.13 “10/80/10” Unnotched Tension 2 (UNT2)



4.14 “50/40/10” Unnotched Tension 3 (UNT3)


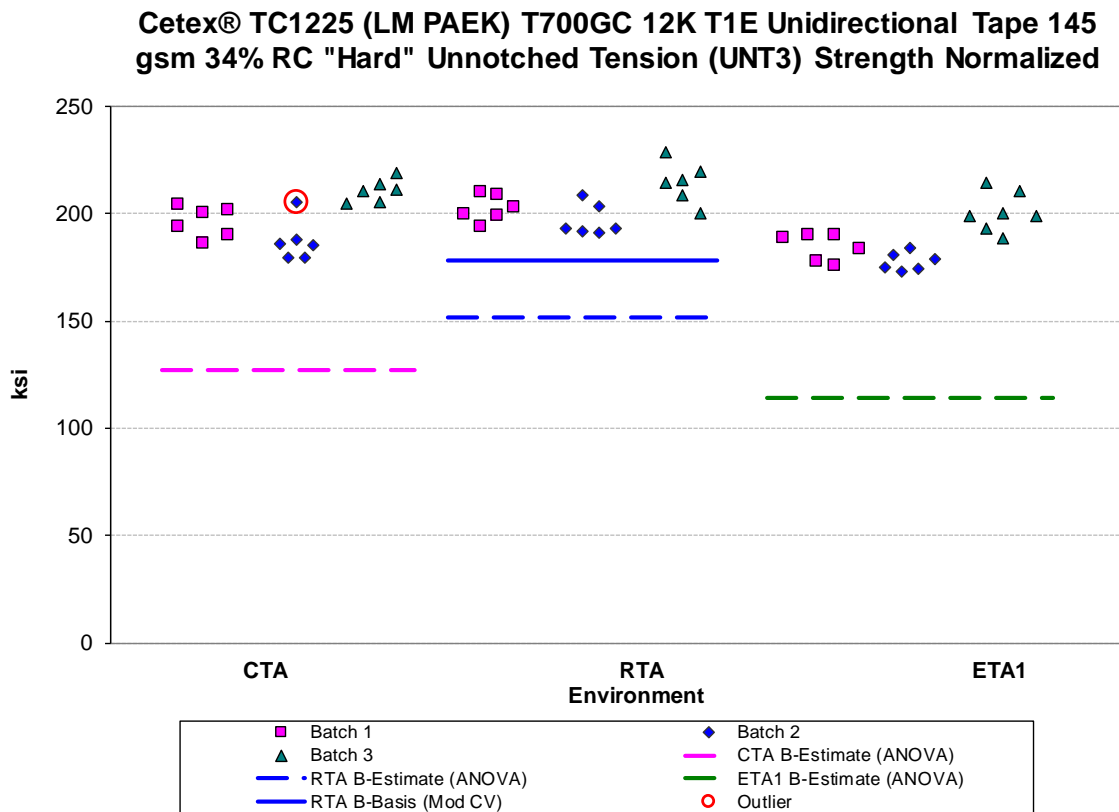


Figure 4-12: Batch Plot for UNT3 Strength normalized

May 14, 2021

NCP-RP-2019-011 Rev A



4.15 “50/0/50” Unnotched Compression 0/90 (UNC0)

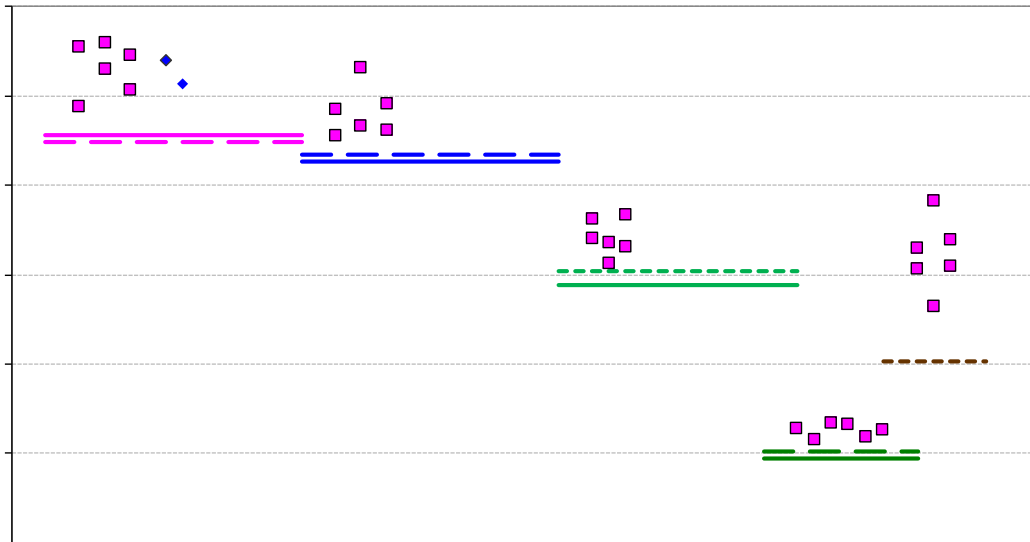

May 14, 2021

NCP-RP-2019-011 Rev A

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	102.2	96.29	68.78	24.99	64.27	104.2	97.68	68.93	24.54	63.30



May 14, 2021

NCP-RP-2019-011 Rev A

4.16 “25/50/25” Unnotched Compression 1 (UNC1)

May 14, 2021

NCP-RP-2019-011 Rev A



May 14, 2021


NCP-RP-2019-011 Rev A

4.18 “50/40/10” Unnotched Compression 3 (UNC3)

Env	RTA (70 F)	ETA1 (275 F)	RTA (70 F)	ETA1 (275 F)
Mean	98.06	74.81	102.8	78.41
Stdev	5.584	3.541	4.412	3.002
CV	5.695	4.733	4.291	3.829
Modified CV	6.847	6.367	6.146	6.000
Min	90.95	68.94	94.82	71.87
Max	109.1	82.81	110.9	82.81
No. Batches	3	3	3	3
No. Spec.	18	18	18	18

4.19 “25/50/25” Open-Hole Tension 1 (OHT1)

Cetex® TC1225 (LM PAEK) T700GC 12K T1E Unidirectional Tape 145 gsm

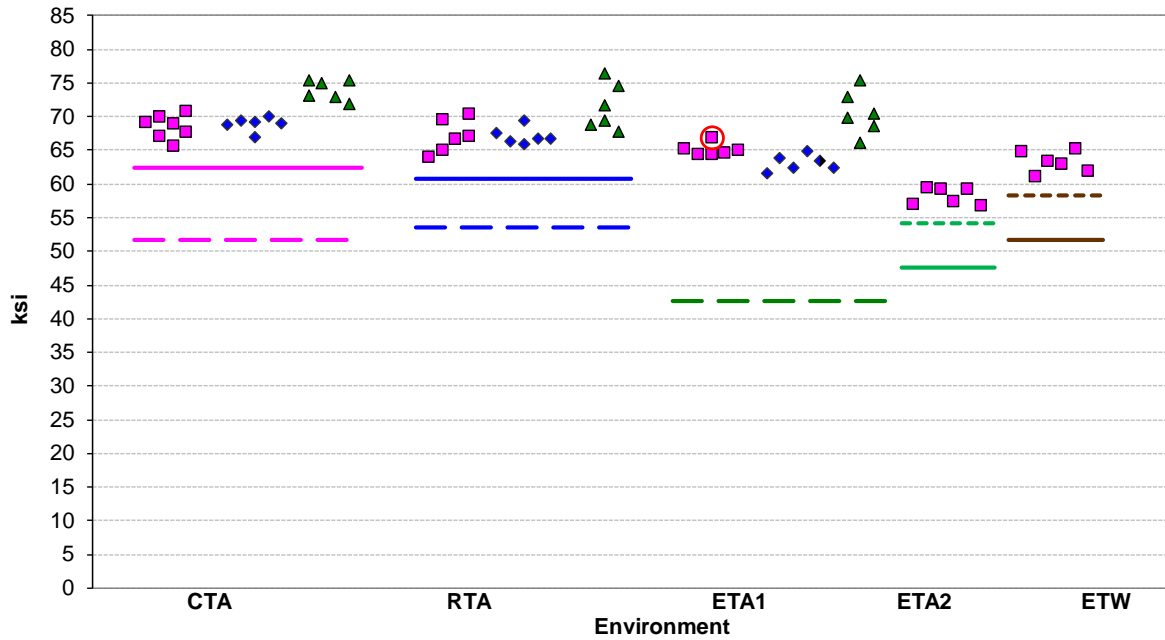

Open-Hole Tension (OHT1) Strength Basis Values and Statistics										
Env	Normalized					As-measured				
	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	70.30	68.52	66.18	58.03	63.11	71.72	69.82	67.24	60.12	65.00
Stdev	2.931	3.227	3.836	1.281	1.608	3.903	4.287	5.125	1.623	1.759
CV	4.169	4.710	5.796	2.208	2.547	5.442	6.141	7.623	2.700	2.706
Modified CV	6.084	6.355	6.898	8.000	8.000	6.721	7.070	7.811	8.000	8.000
Min	65.42	63.82	61.50	56.55	60.97	66.24	63.21	59.29	57.80	63.12
Max	75.35	76.45	75.44	59.29	65.01	78.42	78.29	77.38	62.74	67.61
No. Batches	3	3	3	1	1	3	3	3	1	1
No. Spec.	19	18	18	6	6	19	18	18	6	6
Basis Values and Estimates										
B-estimate	51.62	53.57	42.54	54.15	58.24	45.99	44.84	34.56	55.20	59.68
A-estimate	38.28	42.90	25.68	51.39	54.77	27.62	27.02	11.24	51.71	55.89
Method	ANOVA	ANOVA	ANOVA	Normal	Normal	ANOVA	ANOVA	ANOVA	Normal	Normal
Modified CV Basis Values and Estimates										
B-basis Value	62.49	60.68	NA			NA	NA	NA		
B-estimate				44.04	47.90				45.63	49.34
A-estimate	57.16	55.35		34.47	37.49				35.72	38.62
Method	pooled	pooled		Normal	Normal				Normal	Normal

Table 4-30: Statistics and Basis Values for OHT1 Strength data

May 14, 2021


NCP-RP-2019-011 Rev A

4.20 “10/80/10” Open-Hole Tension 2 (OHT2)

May 14, 2021

NCP-RP-2019-011 Rev A

4.21 "50/40/10" Open-Hole Tension 3 (OHT3)

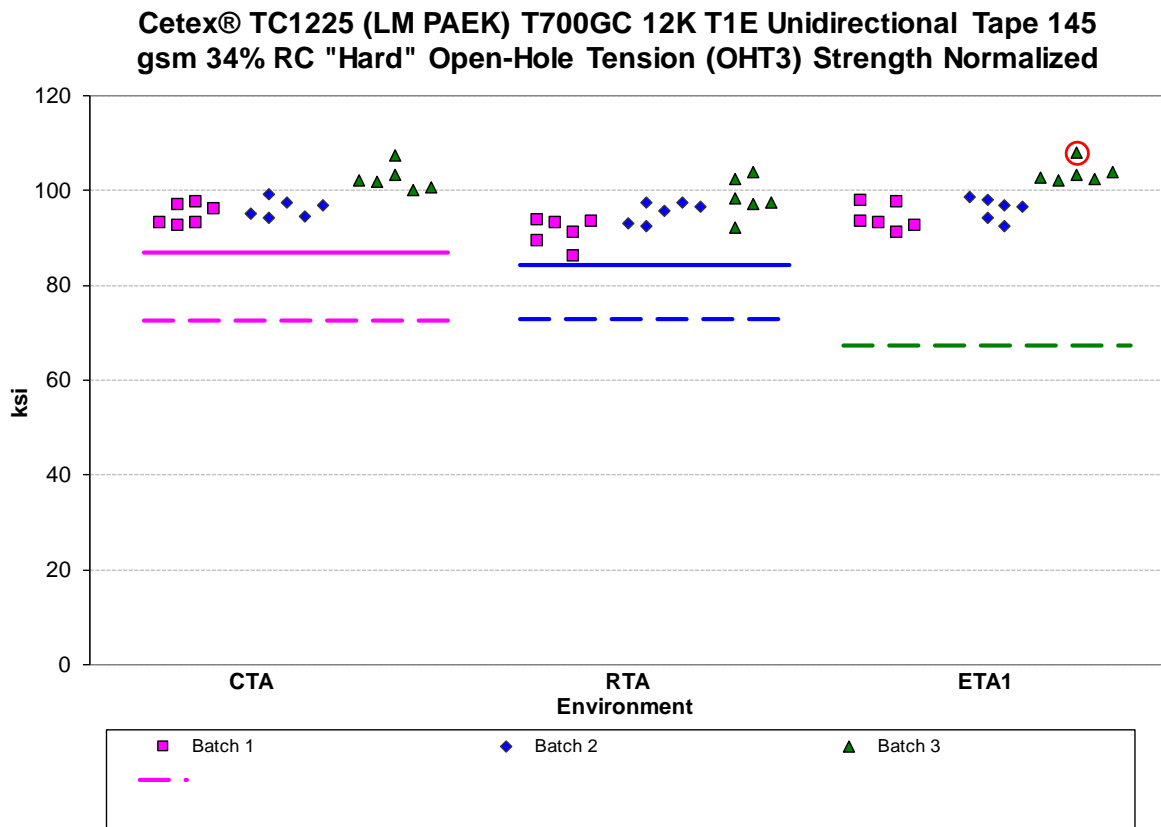

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)
Mean	97.90	95.06	98.05	104.5	102.8	105.2
Stdev	4.107	4.363	4.844	4.276	4.398	5.117
CV	4.195	4.590	4.940	4.091	4.279	4.863
Modified CV	6.097	6.295	6.470	6.045	6.140	6.431
Min	92.48	86.06	90.90	99.05	94.24	98.64
Max	107.6	103.9	108.0	114.9	112.6	114.6
No. Batches	3	3	3	3	3	3
No. Spec.	18	18	18	18	18	18
B-estimate	72.66	72.97	67.26	77.83	79.47	72.05
A-estimate	54.64	57.21	45.29	58.78	62.84	48.38
Method	ANOVA	ANOVA	ANOVA	ANOVA	ANOVA	ANOVA
B-basis Value	87.01	84.18		93.04	91.28	
A-estimate	79.61	76.77		85.21	83.45	
Method	pooled	pooled		pooled	pooled	

4.22

May 14, 2021

NCP-RP-2019-011 Rev A

4.23 “10/80/10” Filled-Hole Tension 2 (FHT2)

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)
Mean	61.81	53.66	44.55	63.41	55.37	45.93
Stdev	1.974	2.878	1.862	2.154	2.654	1.913
CV	3.193	5.363	4.180	3.397	4.793	4.165
Modified CV	6.000	6.682	6.090	6.000	6.396	6.082

Env	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)	CTA (-65 F)	RTA (70 F)	ETA1 (275 F)
Mean	97.61	93.20	95.04	103.0	99.81	102.1
Stdev	4.924	4.402	4.452	6.088	5.012	5.680
CV	5.044	4.723	4.684	5.912	5.022	5.564
Modified CV	6.522	6.362	6.342	6.956	6.511	6.782
Min	89.75	85.87	90.15	93.40	91.29	95.09
Max	106.6	102.3	103.8	114.8	110.4	111.2
No. Batches	3	3	3	3	3	3
No. Spec.	18	18	18	18	18	18



May 14, 2021

NCP-RP-2019-011 Rev A

4.25 “25/50/25” Open-Hole Compression 1 (OHC1)

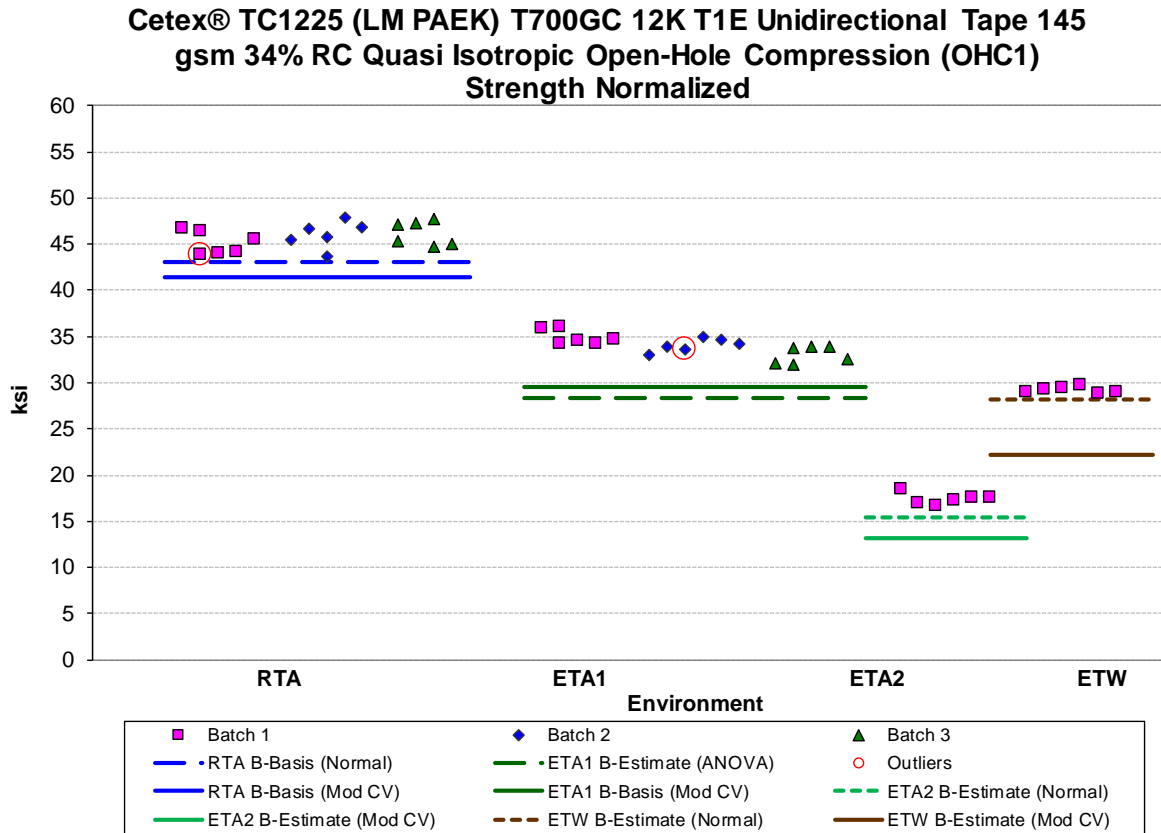



Figure 4-23: Batch plot for OHC1 Strength normalized

Open-Hole Compression (OHC1) Strength Basis Values and Statistics

Env	Normalized				As-measured			
	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	45.79	34.00	17.38	29.19	47.33	34.96	17.77	29.93
Stdev	1.380	1.111	0.6432	0.3394	1.235	1.261	0.7136	0.6402
CV	3.014	3.268	3.701	1.163	2.610	3.607	4.015	2.139
Modified CV	6.000	6.000	8.000	8.000	6.000	6.000	8.000	8.000
Min	43.64	31.95	16.64	28.83	44.99	33.02	17.28	28.98
Max	47.95	35.99	18.47	29.72	48.95	37.47	19.19	30.74
No. Batches	3	3	1	1	3	3	1	1
No. Spec.	18	18	6	6	18	18	6	6
Basis Values and Estimates								
B-basis Value	43.07				44.89			
B-estimate		28.35	15.43	28.17		27.74	16.40	27.99
A-estimate	41.14	24.32	14.05	27.43	43.16	22.58	10.72	26.61
Method	Normal	ANOVA	Normal	Normal	Normal	ANOVA	Non-Parametric	Normal
B-basis Value	41.39	29.59			42.78	30.41		
B-estimate			13.19	22.16				22.72
A-estimate	38.39	26.59	10.33	17.34	39.69	27.32		17.78
Method	pooled	pooled	Normal	Normal	pooled	pooled		Normal

4.26 "10/80/10" Open-Hole Compression 2 (OHC2)

/M au - b u th (M

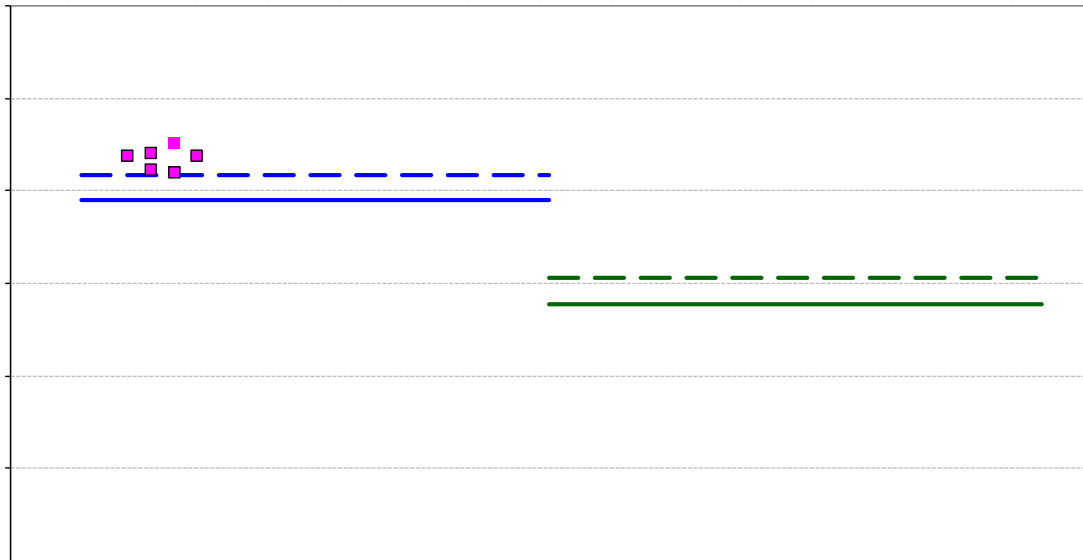

May 14, 2021

NCP-RP-2019-011 Rev A

May 14, 2021

NCP-RP-2019-011 Rev A

4.27 “50/40/10” Open-Hole Compression 3 (OHC3)

Env	RTA (70 F)	ETA1 (275 F)	RTA (70 F)	ETA1 (275 F)
Mean	55.04	40.82	57.59	42.47
Stdev	1.038	0.8034	0.8612	1.448
CV	1.886	1.968	1.496	3.409
Modified CV	6.000	6.000	6.000	6.000
Min	52.64	39.19	56.16	40.35
Max	56.50	42.54	59.23	45.09
No. Batches	3	3	3	3
No. Spec.	18	18	18	18
B-basis Value			55.89	
B-estimate	50.19	36.16		32.57
A-estimate	46.73	32.84	54.68	25.50

May 14, 2021

NCP-RP-2019-011 Rev A

4.28 “25/50/25” Filled-Hole Compression 1 (FHC1)

Env	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
-----	------------	--------------	--------------	-------------	------------	--------------	--------------	-------------

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

May 14, 2021

NCP-RP-2019-011 Rev A

4.29 “10/80/10” Filled-Hole Compression 2 (FHC2)

4.30 “50/40/10” Filled-Hole Compression 3 (FHC3)

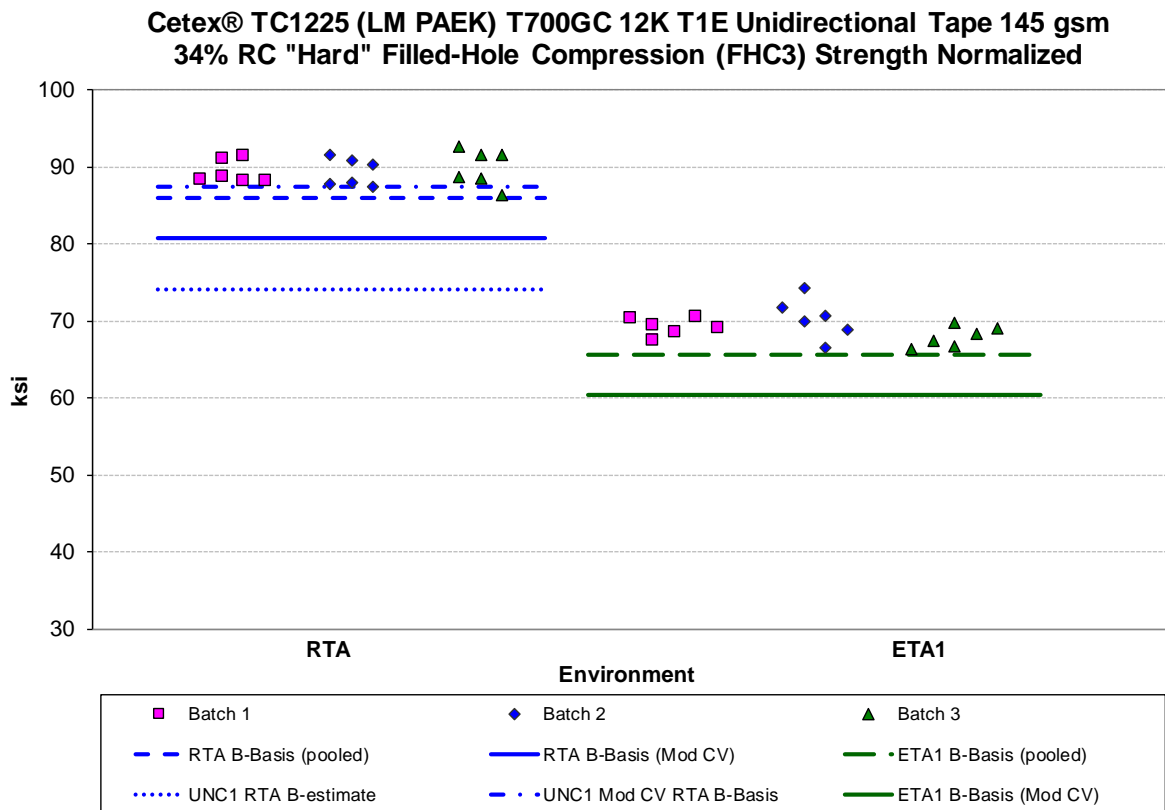


Figure 4-28: Batch plot for FHC3 Strength normalized

3

' 6LQJOH 6KQDU %66% 3URF &

7KH 66% GDWD LV QRUPDOLJHG 'DWD L2IIVHWR6WUHQRVW
8OWLPDWH 6WUHQRVW 2QO\ RQH EDWFKWRG PD:WHQYLIDURQDW
FRQGLWLRQV VREDOVHYDOLXPHDWDWKHDMDFLQDGLWL RQJ

7KH QRUPDOLJHG 2IIVHW 6WUHQRVWDLGELV DWKHW\$RQHWKRQ
VDPSOH WHVW \$. WHVW IRU EDWFK WR EDWFK YDULDE

May 14, 2021

NCP-RP-2019-011 Rev A


Single Shear Bearing (SSB1 Proc. C) 2% Offset Strength Basis Values and Statistics								
Env	Normalized				As-measured			
	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	100.9	84.98	50.58	88.12	107.2	89.28	52.32	91.08
Stdev	7.969	5.031	3.323	4.552	7.308	5.142	2.921	5.390
CV	7.900	5.920	6.569	5.166	6.820	5.759	5.582	5.918
Modified CV	7.950	6.960	8.000	8.000	7.410	6.880	8.000	8.000
Min	87.04	71.88	47.01	79.51	92.64	75.08	48.19	81.38
Max	113.8	94.02	55.75	92.57	119.5	96.56	56.36	96.52
No. Batches	3	3	1	1	3	3	1	1
No. Spec.	18	18	6	6	18	18	6	6
Basis Values and Estimates								
B-basis Value		75.05			95.65	77.77		
B-estimate	68.72		40.52	74.33			43.47	74.75
A-estimate	45.80	68.01	33.36	64.53	87.82	69.94	37.18	63.14
Method	ANOVA	Normal	Normal	Normal	pooled	pooled	Normal	Normal
Modified CV Basis Values and Estimates								
B-basis Value	88.05	72.15			94.23	76.35	39.71	69.13
B-estimate			38.39	66.88				
A-estimate	79.32	63.41	30.05	52.35	85.44	67.55	31.08	54.11
Method	pooled	pooled	Normal	Normal	pooled	pooled	Normal	Normal

May 14, 2021

NCP-RP-2019-011 Rev A

4.32 “10/80/10” Single-Shear Bea

4.34 Interlaminar Tension and Curved Beam Strength (ILT and CBS)

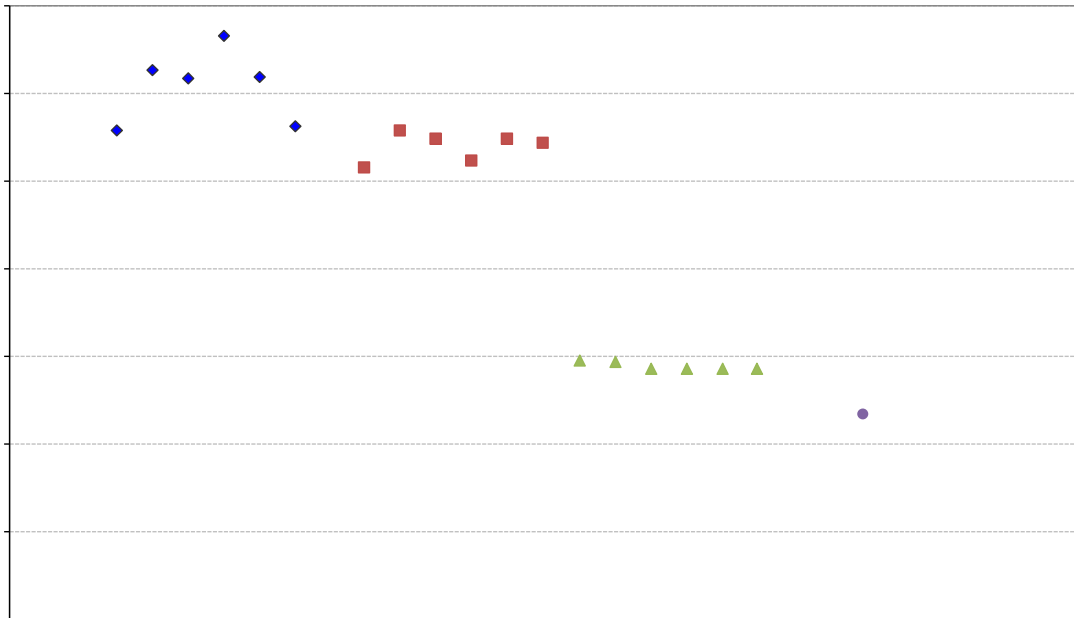

4.35 “25/50/25” Compression After Impact 1 (CAI1)

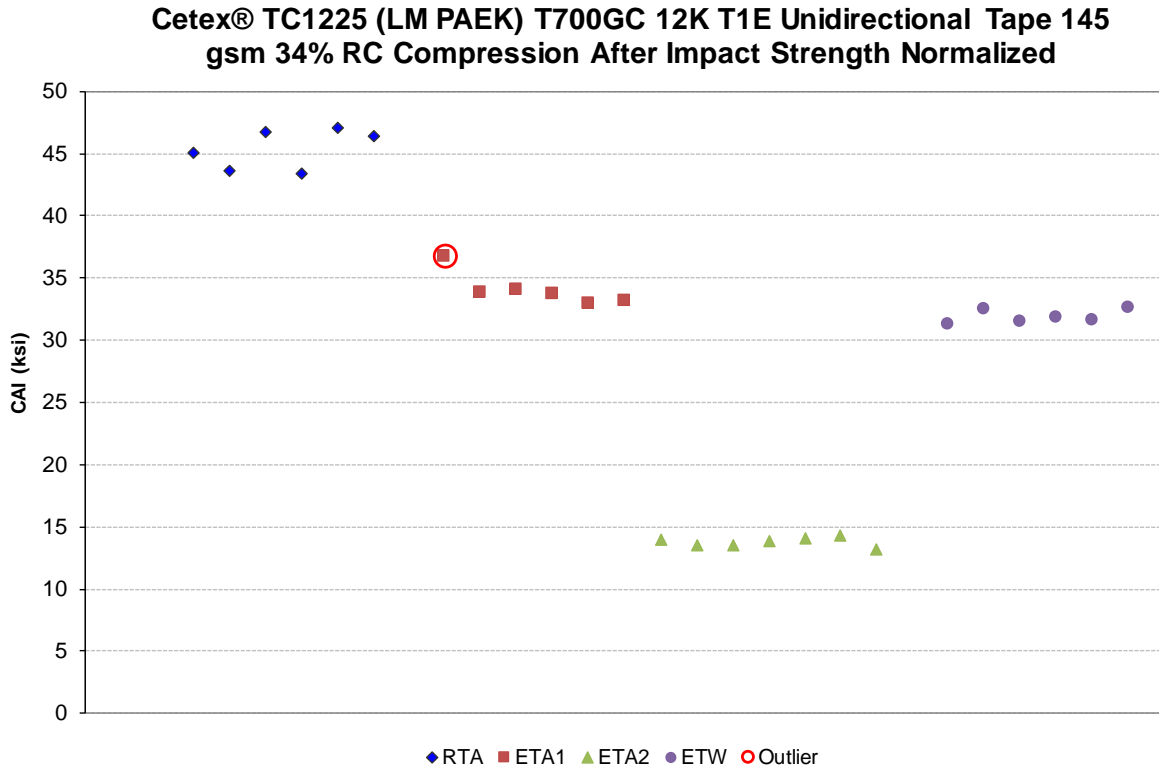


Figure 4-35: Plot for CAI1 Strength normalized

Env	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)	RTA (70 F)	ETA1 (275 F)	ETA2 (400 F)	ETW (275 F)
Mean	45.38	34.04	13.77	31.86	46.10	34.44	14.14	32.56
Stdev	1.609	1.374	0.3824	0.5476	1.719	1.404	0.4658	0.4867
CV	3.544	4.035	2.777	1.719	3.730	4.077	3.295	1.495
Min	43.39	32.94	13.17	31.25	43.65	33.25	13.37	32.07
Max	47.10	36.71	14.29	32.60	48.06	37.13	14.76	33.13
No. Batches	1	1	1	1	1	1	1	1
No					hec			

May 14, 2021

NCP-RP-2019-011 Rev A

5. Outliers

May 14, 2021

NCP-RP-2019-011 Rev A

Test	Condition	Batch	Specimen Number	Normalized Strength	Strength As- measured	High/ Low	Batch Outlier	Condition Outlier
------	-----------	-------	--------------------	------------------------	--------------------------	--------------	------------------	----------------------

6. References

Statistical Methods

Technometrics